

## ADJUSTABLE FIXTURE SUPPORTS

### FOR SIPHON JET WATER CLOSETS - SHALLOW ROUGH-IN TYPE

**SINGLE**

## VERTICAL FITTINGS

**DOUBLE**

-Rear Support Lug and -M51 Anchor  
Foot Assembly Regularly Furnished.

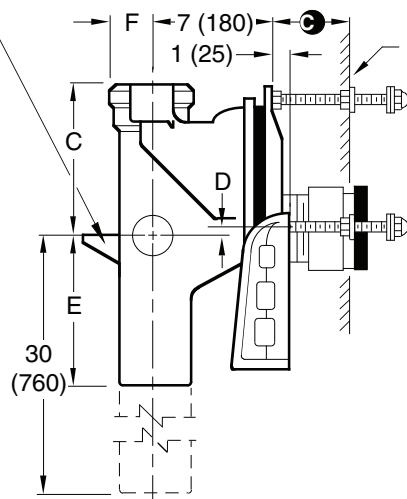


**Fig. 0230**  
**Side View**


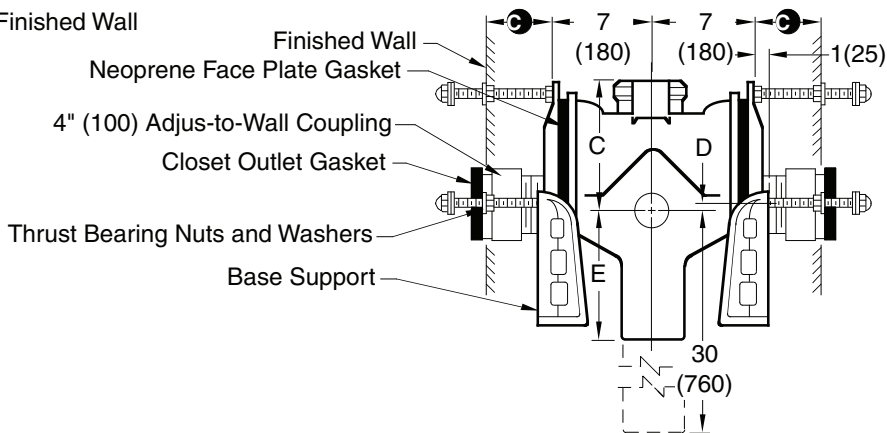


**Fig. 0230D**  
**Side View**

**NOTE:** Base support must be securely anchored to floor (with four 1/2" (13) bolts provided by contractor).

**NOTE:** 1 1/2 (38) or 2 (51) NPT  
Inlet available. Add suffix -N

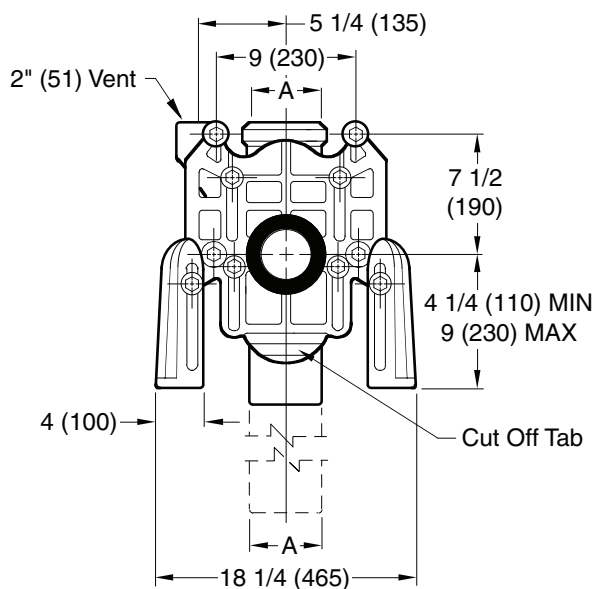

### Front View

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1995, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

**NOTE:** Dimensions shown in parentheses are in millimeters.

- |  |                                           |
|--|-------------------------------------------|
|  | Fig. 0230 . . . CAULK                     |
|  | Fig. 0230D . . . CAULK Double             |
|  | Fig. 0260 . . . CAULK Long Barrel         |
|  | Fig. 0260D . . . CAULK Double Long Barrel |

**C** dimension = 4" (100) (regularly furnished) consisting of nipple and Adjus-to-Wall coupling permitting adjustment from 3" (76) min. to 4" (100) max. Absolute Minumum of 1 1/2"(38) is available using short butt end nipple, less Adjus-to-Wall Coupling.

| A<br>SIZE | C            | D          |             | E            | F          |
|-----------|--------------|------------|-------------|--------------|------------|
|           |              | MIN        | MAX         |              |            |
| 4 (100)   | 9 (230)      | 1 1/2 (38) | 4 1/4 (110) | 10 (255)     | 3 (76)     |
| 5 (125)   | 11 1/2 (290) | 1 1/2 (38) | 4 1/4 (110) | 11 1/2 (290) | 3 1/2 (89) |
| 6 (150)   | 11 1/2 (290) | 1 1/2 (38) | 4 1/4 (110) | 11 1/2 (290) | 4 (100)    |

Conforms with the requirements of ASME A112.6.1M  
up to a 500 lbs (227kg) static load rating.

|                  |                                          |                                                                |                       |                      |                  |                      |                                   |
|------------------|------------------------------------------|----------------------------------------------------------------|-----------------------|----------------------|------------------|----------------------|-----------------------------------|
| M<br>L<br>K<br>J | 6-17-26<br>12-7-22<br>10/09/99<br>7-1-98 | Revised Text<br>Added Note<br>Deleted Note<br>Submittal Update | TB<br>KK<br>JJ<br>ASL | CL<br>CL<br>BS<br>BS | WEIGHT<br>POUNDS | VOLUME<br>CUBIC FEET | FIGURE NUMBER<br><b>0230,0260</b> |
| REV.             | DATE                                     | DESCRIPTION                                                    | BY                    | CKD. BY              |                  |                      |                                   |



**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)