


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

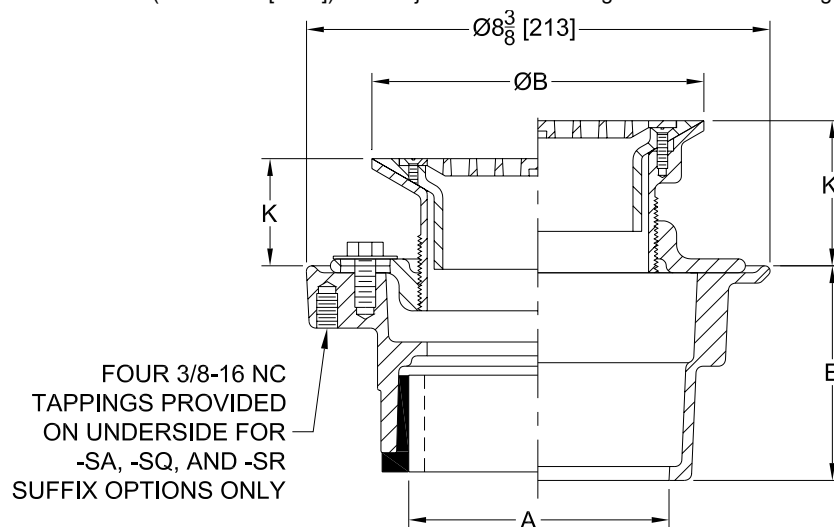

Dimensions in Inches [mm]						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm2]
A - Pipe Size	B - Top Size	K		K'			
		Min.	Max.	Min.	Max.		
2,3,4 [51,76,102]	6 [152]	1-1/4 [32]	2-3/8 [60]	2-3/16 [56]	3-5/16 [84]	13 [6]	7 [45]
	9 [229]	1-11/16 [43]	2-5/8 [66]	2-7/16 [62]	3-9/16 [90]	20 [9]	18 [116]

ENGINEERING SPECIFICATION: ZURN Z415H

ZURN Z415H Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE H" polished nickel bronze, light-duty strainer with flashing clamp device for clamping at the finished floor level.

OPTIONS

PIPE SIZE (ØA)

2 [51]	_____ IP	Threaded
3 [76]	_____ IP	Threaded
4 [102]	_____ IP	Threaded
2,3,4 [51,76,102]	_____ NH	No-Hub
2,3,4 [51,76,102]	_____ NL	Neo-Loc

OUTLET (specify size)

'E' OUTLET HT. DIM.

2-7/16 [62]
2-3/4 [70]
2-13/16 [71]
3-13/16 [97]
3-7/8 [98]

PREFIXES

_____ ZB	D.C.C.I. Body Assembly w/ Polished Bronze Top
_____ ZN	D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

_____ -AR	Acid Resisting Epoxy Coated Cast Iron	_____ -SR	Stabilizer Ring
_____ -G	Galvanized Cast Iron	_____ -TC	Neo-loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
_____ -LR	6 [152] Nickel Bronze Ligature Resistant** Strainer (Open Area 1.9 in ² [12.3 cm ²])	_____ -U	1-3 [25-76] High Extension Adapter
_____ -P	Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])	_____ -V	Backwater Valve
_____ -SA	Stabilizer Assembly (See Z1035)	_____ -VP	Vandal-Proof Secured Top
_____ -SQ	Stabilizer Q-Deck (See Z1035-Q)	_____ -Y	Sediment Bucket

* Regularly furnished unless otherwise specified.

**DISCLAIMER: By "ligature resistant," Zurn refers to the fact that this product is designed and manufactured to reduce the risk that it may be utilized as an apparatus for ligature. Zurn does not represent or warrant that this product is incapable of being used for ligature or ligature-free, and Zurn will not be liable for any claims, loss, or damages arising from ligature attachment on our products. This product is not a replacement for professionals who are trained in the proper evaluation, management, and supervision of persons at risk of self-harm or suicide. It is the purchaser's responsibility to ensure that products purchased and installed are suitable for the environments in which they are installed, and that suitable supervision and protective measures are in place to protect those at risk.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov




Z415H-LR

BODY ASSEMBLY W/ "TYPE H" CLAMP DEVICE AND "TYPE LR" LIGATURE RESISTANT STRAINER

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

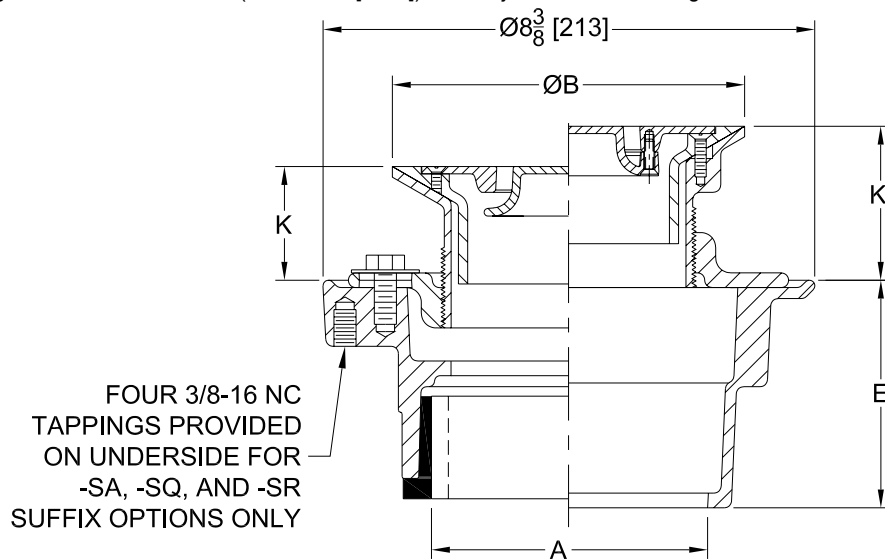

Dimension in Inches [mm]						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm2]
A - Pipe Size	B - Top Size	K		K'			
		Min.	Max.	Min.	Max.		
2,3,4 [51,76,102]	6 [152]	1-1/4 [32]	2-3/8 [60]	2-3/16 [56]	3-5/16 [84]	13 [6]	1.9 [12.3]

ENGINEERING SPECIFICATION: ZURN Z415H-LR

ZURN Z415H-LR Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE LR" polished nickel bronze, light-duty, heel-proof, ADA, vandal proof ligature resistant** strainer, with flashing clamp device for clamping at the finished floor level.

OPTIONS

PIPE SIZE (ØA)

2 [51]

3 [76]

4 [102]

2,3,4 [51,76,102]

2,3,4 [51,76,102]

OUTLET (specify size)

____ IP Threaded

____ IP Threaded

____ IP Threaded

____ NH No-Hub

____ NL Neo-Loc

'E' OUTLET HT. DIM.

2-7/16 [62]

2-3/4 [70]

2-13/16 [71]

3-13/16 [97]

3-7/8 [98]

PREFIXES

____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

____ -AR Acid Resisting Epoxy Coated Cast Iron

____ -G Galvanized Cast Iron

____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])

____ -SA Stabilizer Assembly (See Z1035)

____ -SQ Stabilizer Q-Deck (See Z1035-Q)

____ -SR Stabilizer Ring

____ -TC Neo-loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only)

____ -U 1-3 [25-76] High Extension Adapter

____ -V Backwater Valve

* Regularly furnished unless otherwise specified.

**DISCLAIMER: By "ligature resistant," Zurn refers to the fact that this product is designed and manufactured to reduce the risk that it may be utilized as an apparatus for ligature. Zurn does not represent or warrant that this product is incapable of being used for ligature or ligature-free, and Zurn will not be liable for any claims, loss, or damages arising from ligature attachment on our products. This product is not a replacement for professionals who are trained in the proper evaluation, management, and supervision of persons at risk of self-harm or suicide. It is the purchaser's responsibility to ensure that products purchased and installed are suitable for the environments in which they are installed, and that suitable supervision and protective measures are in place to protect those at risk.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. P
Date: 09/04/25
C.N. No. 147157
Patent zurn.com/patents
Prod. | Dwg. No. Z415H

Page 2 of 2