




ZN1201-N_4

NARROW WALL WITH 8-13/16 [224] FRONT TO BACK EZCARRY®
ADJUSTABLE HORIZONTAL HIGH PERFORMANCE
SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG _____


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

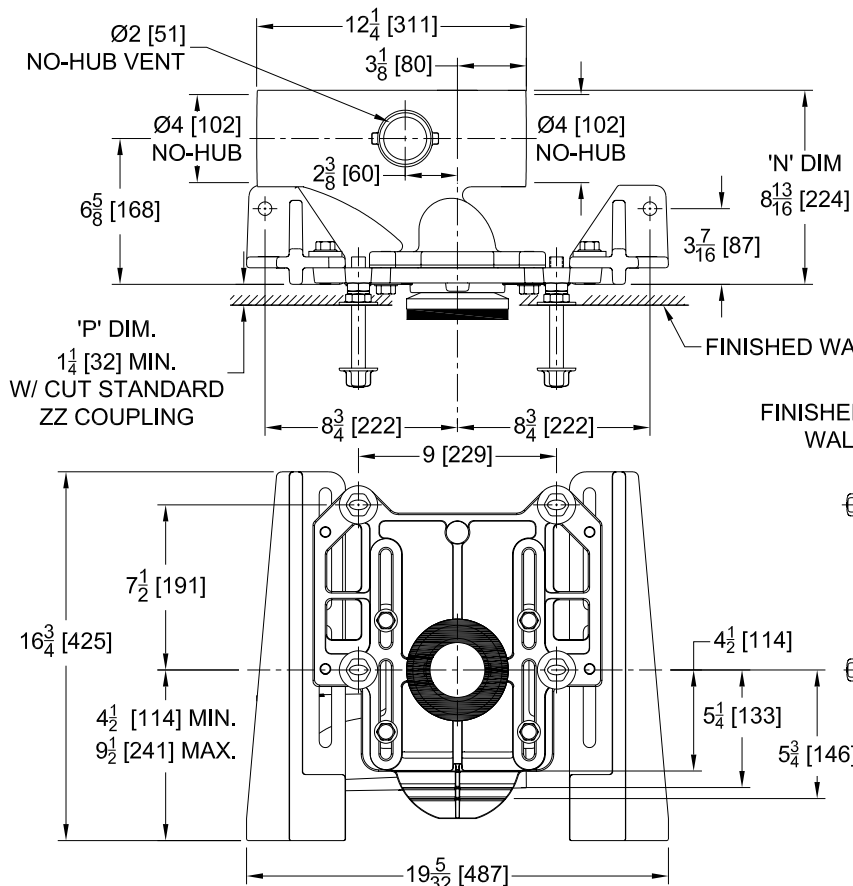

Note:

1. Cut ZZ coupling, Min. 'P' Dim. Obtainable=1 1/4 [32]. Cut ZQ CE coupling, Min. 'P' Dim. Obtainable=1 9/16 [40].
2. Carrier floor anchors must be able to withstand a pull-out force of 1741 lbs [790kg].
3. Pull-out forces are calculated values with standard coupling assembly. No safety factor has been applied. See Form # C38 for more information.

Product Number	Approx. Wt. lbs [kg]
ZN1201-NL4	75 [34]
ZN1201-NR4	

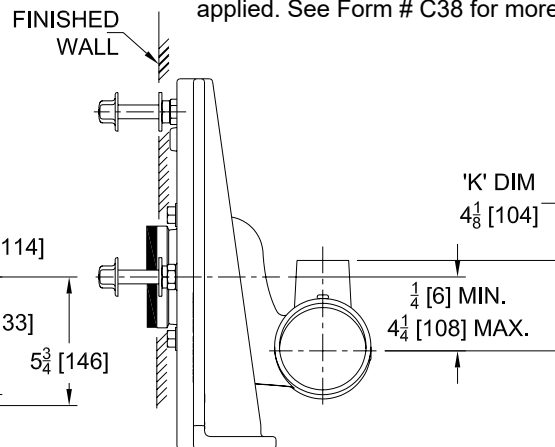

ZN1201-NR4 Illustrated

ENGINEERING SPECIFICATION: ZURN ZN1201-N_4

EZCarry® Narrow Wall horizontal siphon jet water closet carrier system with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 4" [102 mm] no-hub connections, and extended 2" [51mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gasket optimizes flow performance while reducing installation steps. Complete system includes adjustable faceplate, QuickFit™ faceplate gasket, floor mounted foot supports; fixture bolts, trim, and stud protectors. EZCarry® narrow wall system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

OPTIONS (Check/specify appropriate options)

- ____ ZN1201-NL4 4 [102] No-Hub Left Hand Inlet with Flow to Right
____ ZN1201-NR4 4 [102] No-Hub Right Hand Inlet with Flow to Left

PREFIXES

- ____ ZN D.C.C.I. System with Zurn ZZ Adjustable Coupling*
____ ZNQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- ____ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
____ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap
____ -G Galvanized Cast Iron
____ -VP Vandal-Proof Trim
____ -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. D
Date: 07/23/24
C.N. No. 146099
Patent zurn.com/patents
Prod. | Dwg. No. ZN1201-N_4

Page 1 of 1